










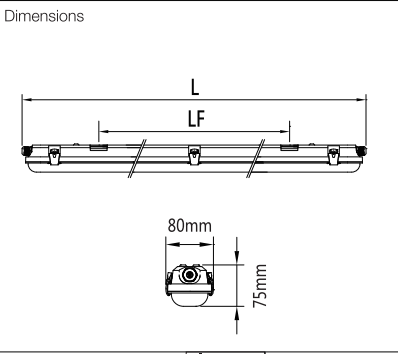


**Content**

 1X  
 2X  
 2X  
 2X  
 2X  
 2X  
 BX  
 1X  
 2X  
 1X  
 1X  

Model	B
1560mm	12
1260mm	10
660mm	6




**Inrush current**






	65W	55W	43W	30W	25W	18W
Driver	60W 350mA 170V 230V	60W 350mA 170V 230V	40W 350mA 115V 230V	30W 350mA 85V 230V	30W 350mA 85V 230V	20W 350mA 57V 230V
Inrush current I <sub>peak</sub>	6.9	6.9	5.56	5.16	5.16	3.58
Inrush current T <sub>width</sub>	58	58	47	47	47	40



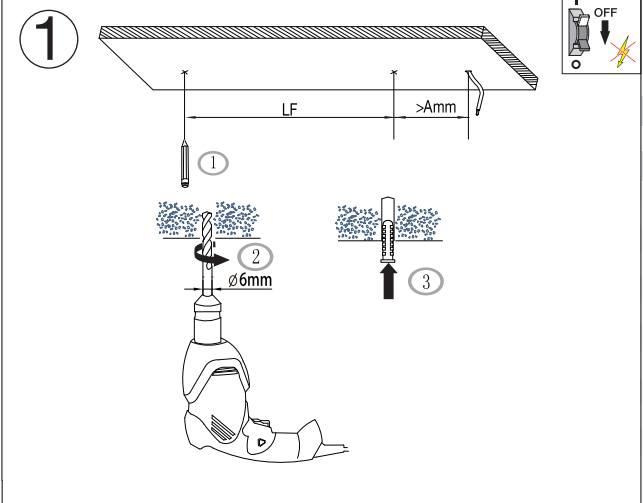


	65W/DALI	55W/DALI
Driver	60/220-240 /350	60/220-240 /350
Inrush current I <sub>peak</sub>	20.9	20.9
Inrush current T <sub>width</sub>	192	192

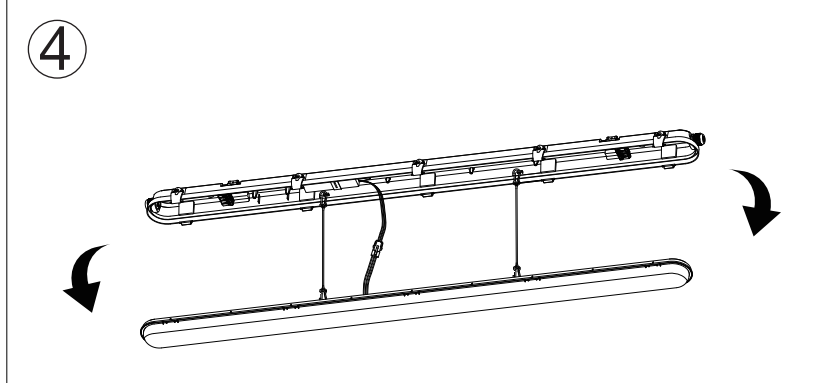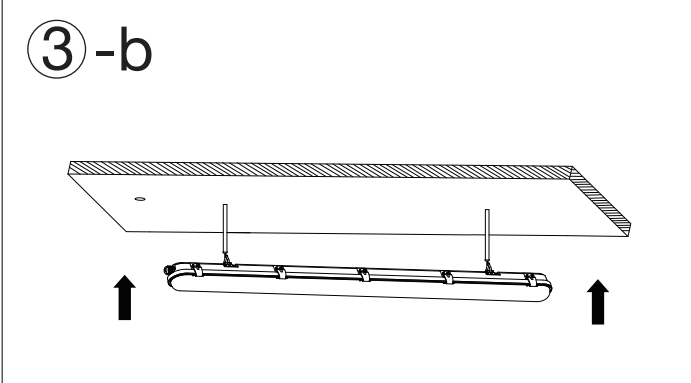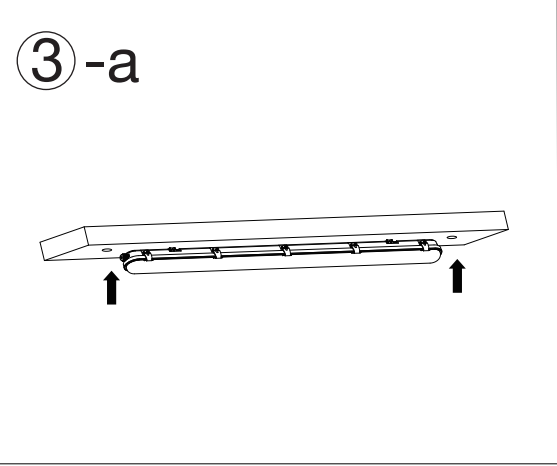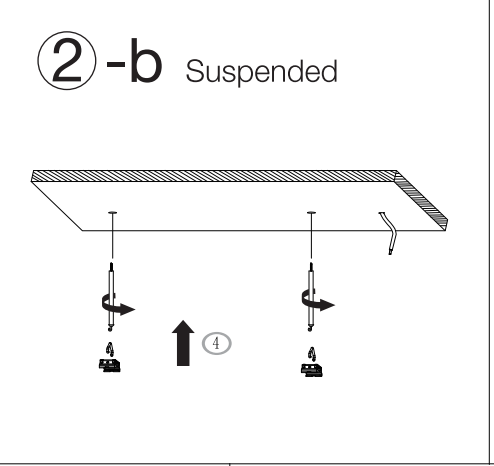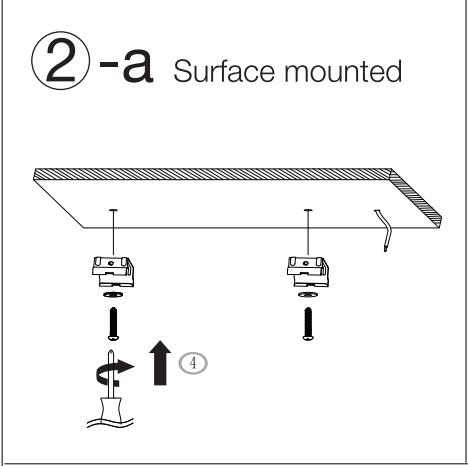


EAN	W	lm	K	R <sub>a</sub>	T <sub>a</sub> (°C)	Vac	Hz	Dim	kg	L	LF	A	Max number of interconnect with same model:
8719157011853	65	9100	6500	80	0-40°C	220-240	50/60	Yes	2.15	1560	960	350	10 pcs
8719157011884	65	9100	6500	80	0-40°C	220-240	50/60	Yes	2.15	1560	960	350	10 pcs
8719157024723	43	6000	4000	80	0-40°C	220-240	50/60	Yes	2.15	1560	960	350	15 pcs
8719157024730	65	9100	4000	80	0-40°C	220-240	50/60	Yes	2.15	1560	960	350	10 pcs



**!** This product is equipped with a LED light source which cannot be replaced.  
This product have a control gear that can be replaced but only by authorised professional personnel.


    

**5-a**

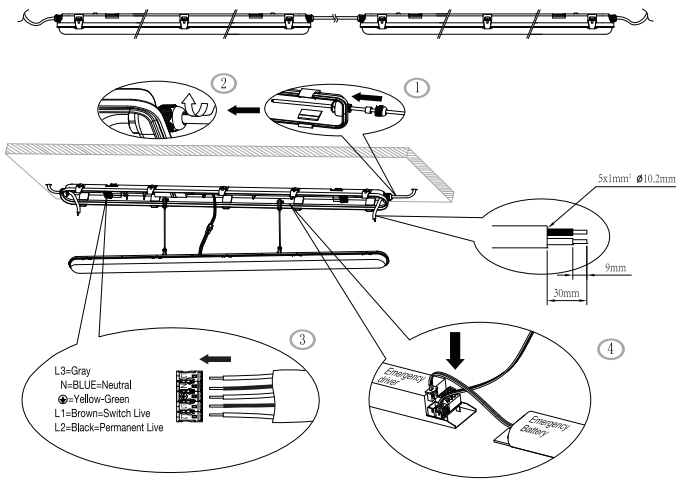


Supply cord shall be at least equal in their mechanical and electrical properties to those specified in 60245 IEC 89 .

**5-b**

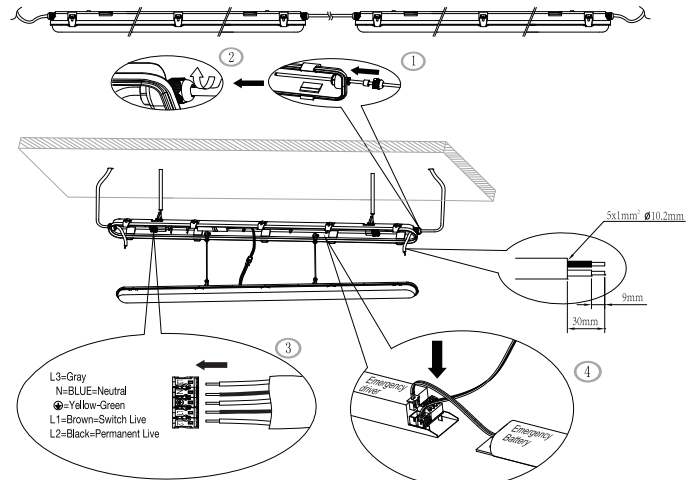


Supply cord shall be at least equal in their mechanical and electrical properties to those specified in 60245 IEC 89 .

**6-a**

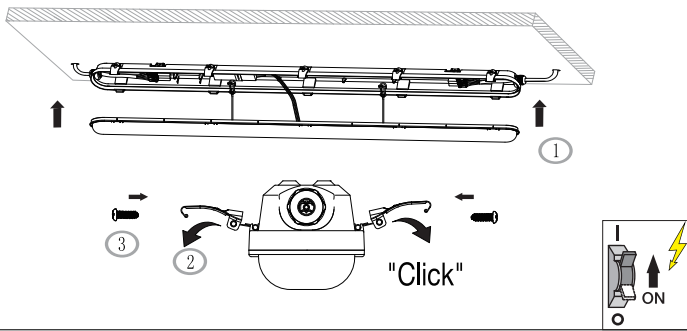

**6-b**

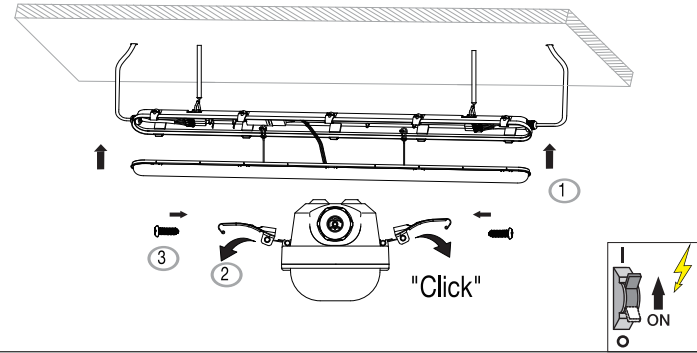

**Sensor DIP Setting**

**Detection Range**

	1	
I	●	100%
II	○	50%

**Hold Time**

	2	3	
I	●	●	5S
II	●	○	1min
III	○	●	3min
IV	○	○	10min

**Daylight Sensor**

	4	
I	●	Disable
II	○	30Lux




	Item Specification	600mm 18W	1200mm 18W	1200mm 30W	1500mm 25W	1500mm 43W	1500mm 55W	1500mm 65W	1500mm 65W + DALI
Circuit Breaker	B16	80 PCS	80 PCS	60 PCS	60 PCS	45 PCS	30 PCS	30 PCS	29 PCS
	C16	80 PCS	80 PCS	60 PCS	60 PCS	45 PCS	30 PCS	30 PCS	34 PCS

**EN** The luminaire shall be installed and maintained by a qualified electrician, in accordance with the national regulations in each country. The luminaire contains no replaceable parts. In case of the luminaire is damaged, it shall be exclusively replaced by the manufacturer or authorized dealer. Keep the operating manual for later use. The manufacturer is not responsible for the incorrect use and assembly of this product.  
**NL** De armatuur dient te worden geïnstalleerd en onderhouden door een erkend installateur, in overeenstemming met de nationale regelgeving in het betreffende land. De armatuur bevat geen vervangbare onderdelen. Indien de armatuur is beschadigd dient deze enkel te worden vervangen door de fabrikant of door een erkende dealer. Bewaar de handleiding voor later gebruik. De fabrikant is niet verantwoordelijk voor onjuist gebruik en/of installatie van dit product.  
**DE** Die Leuchte muss von einem qualifizierten Elektriker gemäß den nationalen Vorschriften in jedem Land installiert und gewartet werden. Die Leuchte enthält keine austauschbaren Teile. Falls die Leuchte beschädigt ist, wird sie ausschließlich durch den Hersteller oder den autorisierten Händler ersetzt. Bewahren Sie die Bedienungsanleitung für spätere Verwendung auf. Der Hersteller ist nicht verantwortlich für die unsachgemäße Verwendung und Montage dieses Produktes.  
**FR** Le luminaire doit être installé et entretenu par un électricien qualifié, conformément à la réglementation nationale de chaque pays. Le luminaire ne contient pas de pièces remplaçables. Dans le cas où le luminaire est endommagé, il doit être remplacé exclusivement par le fabricant ou le revendeur agréé. Conservez le mode d'emploi pour une utilisation ultérieure. Le fabricant n'est pas responsable de l'utilisation et du montage incorrects de ce produit.  
**IT** L'apparecchio deve essere installato e mantenuto da un elettricista qualificato seguendo le normative nazionali di riferimento. L'apparecchio non contiene parti sostituibili. In caso di rottura sarà sostituito esclusivamente dal produttore o da un rivenditore autorizzato. Conservate il manuale di installazione per eventuali utilizzi successivi. Il produttore non è responsabile per l'utilizzo ed il montaggio non corretto di tale apparecchio.  
**ES** La luminaria debe de ser instalada y mantenida por un electricista cualificado, siguiendo las regulaciones nacionales de cada país. La luminaria contiene partes no reemplazables. En el caso de que la luminaria sea dañada, deberá ser reemplazada exclusivamente por el fabricante o distribuidor autorizado. Guarde el manual para usos posteriores. El fabricante no es responsable por el uso e instalación incorrecta de este producto.

**GB IMPORTANT INSTALLATION INFORMATION**

- Installation should be carried out in accordance with the current edition of the National Wiring Regulations. If in doubt, consult a qualified electrician.
- Mains supply voltage 220-240V AC 50/60Hz, Emergency Lumen 290.
- Ensure that ALL electrical connections are tight with no loose strands.
- Before commencing installation or maintenance, ensure electricity is switched off at the mains.
- Permanent Live to Terminal marked -L2  
Switched Live to terminal marked -L1  
Neutral to terminal marked N
- The green charging indicator will be visible when in normal operation .
- The battery contained in this luminaire are not replaceable;when the battery no longer meet it rated duration of operation after the corresponding recharge period.The whole luminaire shall be replaced.
- "The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person." and the replacement of the whole luminaire is needed when it no longer meet 3 h of emergency operation after the recharged period.

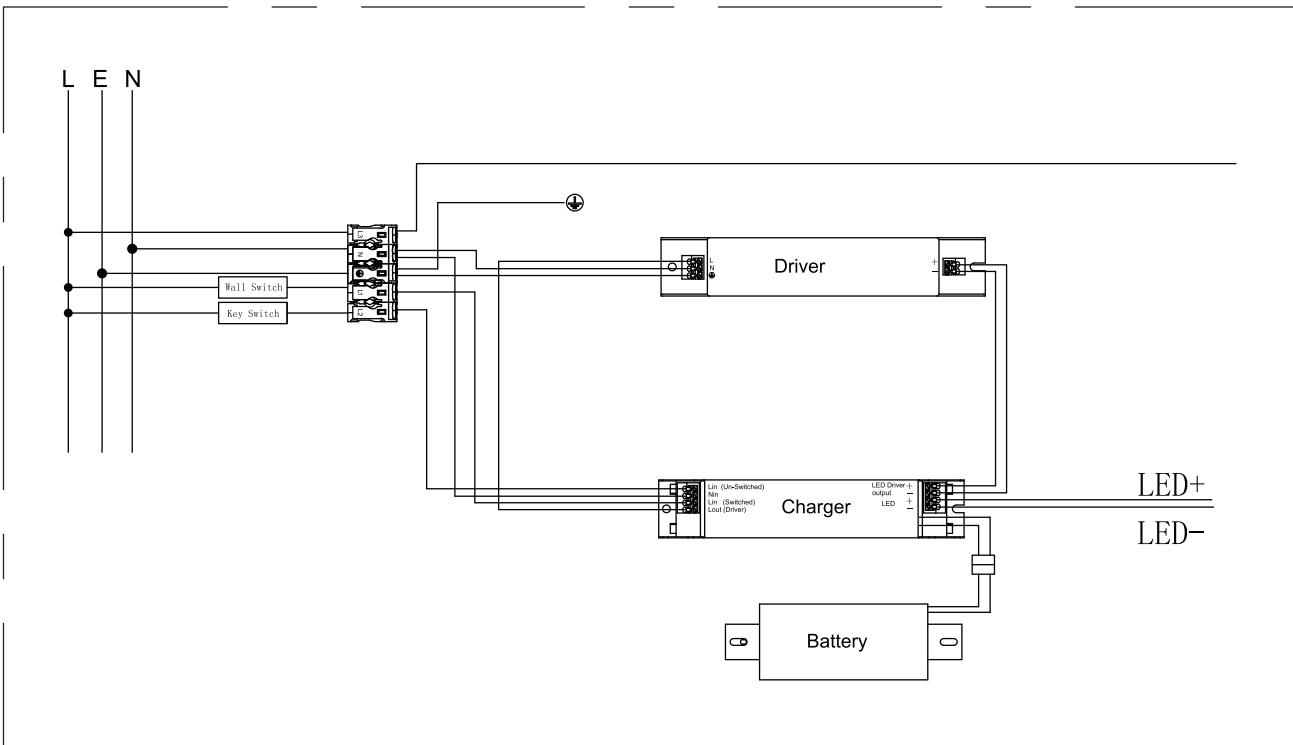

1. For emergency function, refer to above drawing, when two switch ON , lamp will be lighted , and the LED indicator will be lighted to green also.
2. Lamp will be turned on/off by wall switch, key switch will be ON always, LED indicator will be lighted always also.
3. When turn off 2 switch, LED indicator will be turned off, and lamp will come to emergency function for 3hours at least.